




CBEB

FEATURES:

- Tantalum case, Hermetically Sealed, Cylindrical, Radial-lead, Heteropolarity
- Commingled by Electrolytic Tantalum Capacitor and Electrochemical Capacitor, Small size, Super Capacitance.
- Stable in Electrical Performances, High Reliability, Long life-span, Maximum in the Density of Capacitance is higher than CBEB series.
- Built-in as battery in Energy-converted-circuit & Power-pulsed-circuit, functioned as filtering, storage energy, time-delay circuit.

SPECIFICATIONS

Operating Temperature	-55°C to +125°C (to +125°C, with rated voltage derating)
Storage Temperature	-62°C ~ +130°C
Capacitance Tolerance	Q: (-10%~+30%), K: (±10%), M: (±20%)




◆ Electrical Characteristics


Rated Voltage (V)	Category Voltage (V)	Surge Voltage (V)	Cap. (μF)	tgδ (%)	ESR (Ω) 1kHz	DCL (μA)		Impedance at (Ω) 100Hz	Capacitance Change at (%)		Dimensions DxH (mm)
						25°C	85°C, 125°C		-55°C	-55°C 85°C	
10 1A	6	11	100000 150000	180	0.035 0.025	300	1800	1	-80	+160	35.5x12 35.5x16
16 1C	9.5	17.6	60000 90000	165	0.035 0.025	300	1800	1	-80	+160	35.5x12 35.5x16
25 1E	15	27.5	36000 54000	130	0.04 0.035	300	1800	1	-75	+160	35.5x12 35.5x16
35 1V	20	38.5	24000 36000	95	0.04 0.035	300	1800	1	-70	+160	35.5x12 35.5x16
50 1H	30	55	11000	65	0.1	300	2400	1.2	-60	+120	35.5x10
			12000	65	0.1	300			-60	+120	35.5x12
			16000	70	0.04	400			-55	+135	35.5x12
			18000	70	0.04	400			-55	+135	35.5x12
			24000	70	0.035	400			-55	+135	35.5x16
63 1J	38	70	8000 12000	50	0.04 0.035	400	2400	1.4	-45	+90	35.5x12 35.5x16
80 1K	48	88	5600 8200	40	0.06 0.04	500	3000	1.6	-40	+90	35.5x12 35.5x16
100 2A	60	110	2400	35	0.08	500	3000	1.8	-30	+80	35.5x12
			3800		0.05						35.5x12
			3600		0.05						35.5x16
			5700		0.05						35.5x16
110 2F	66	121	1200	35	0.08	500	3000	2	-25	+60	35.5x12
			1800		0.075						35.5x16
			3000		0.075						35.5x16
			4500		0.075						35.5x16
125 2Q	75	138	1100	30	0.08	500	3000	2.4	-25	+50	35.5x12
			1600		0.075			2.4	-25	+50	35.5x16
			2200		0.075			2.4	-25	+50	35.5x12
			3300		0.05			2.4	-25	+50	35.5x16
			3300		0.05			2.2	-20	+45	35.5x19

Dimensions (unit: mm)


Φ35.5x10/12/16/19 Layout (A Type)

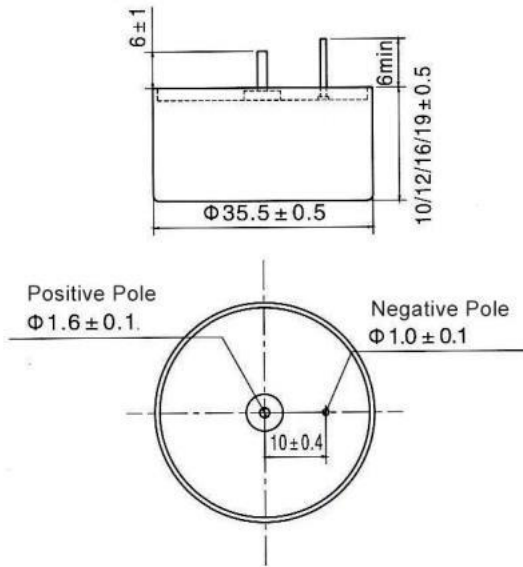

Φ35.5x10/12/16/19 Layout (B Type)

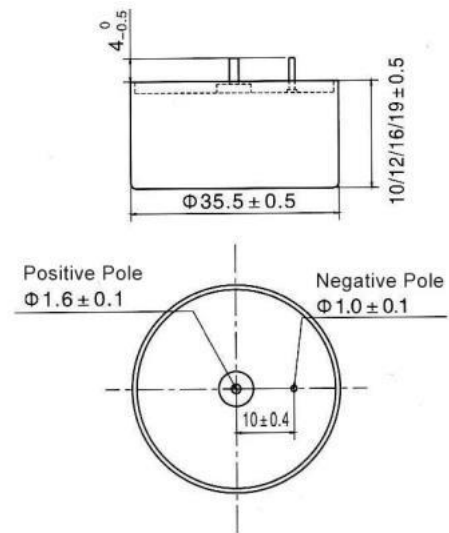

Φ35.5x10/12/16/19 Mounting bracket

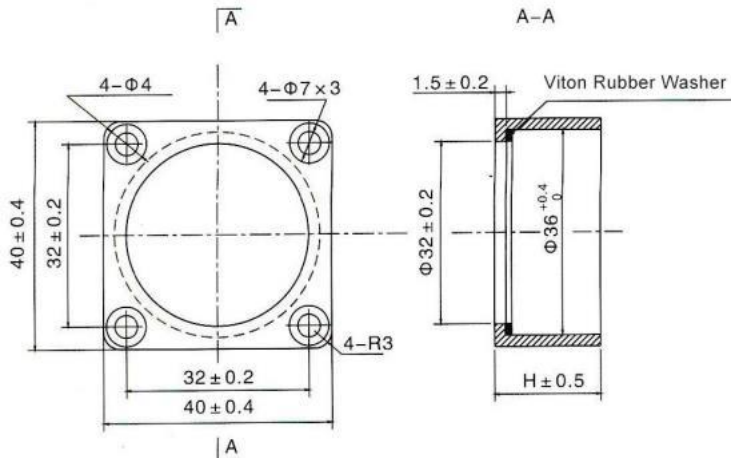

Dimensions (mm) code	H ± 0.5 mm
Φ35.5x10 J2	10.3
Φ35.5x12 J3	12
Φ35.5x16 J4	16
Φ35.5x19 J6	20

Note:

1. Please do not use multimeter through the measuring procedures (may cause irreversible damage and lead to discard).
2. Capacitance and DF measured at 100Hz, $U_- = 2.20^0_{-1.0}V$, $U_+ = 1.0^0_{-0.5}V$ Test only applied in series equivalent circuit.
3. Voltage derating is applied at +125°C. (The DCL parameter should be read after 5 minutes when it connected to the circuit).
4. Special size and demand could consult with us.

PART NUMBER EXAMPLE

